


AEDONPUMP

RAPTOR 6D HEAVY

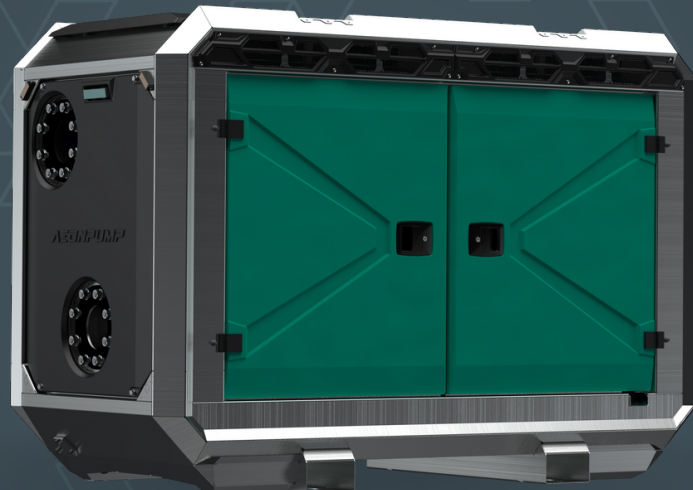

DIESEL

**DRIVEN SEWAGE
AND DEWATERING PUMP**




FEATURES AND COMPETITIVE EDGE

Type: **Raptor 6D heavy**
Connection size: **6"**

Frame LxWxH: **2299x1100x1601 mm**
Dry weight: **1450 kg**
Fuel tank capacity: **270 L**
Sound level: **64 dB (at 10 m)**


Designed for heavy duty applications.
Sewage bypass, drainage and dewatering:

- Extended maintenance intervals;
- High-grade parts of superior quality;
- Online telemetry and remote access capability;
- Unsurpassed efficiency values that set the industry standard.

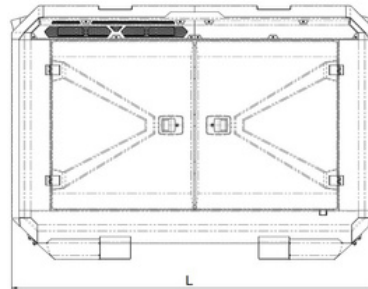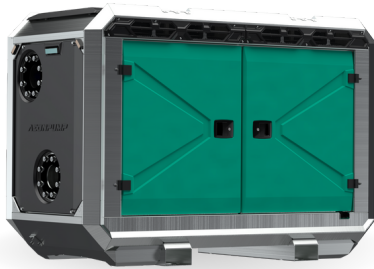

PUMP TECHNICAL SPECIFICATION

Pump Max. flow: **500 m³/h**
Max. pressure: **46 m**
Impeller type: **Screw impeller**
Solids handling: **100 mm**
Temperature: **max. 40°C**
Casing: **GG25 (0.6025)**
Impeller: **GGG60 (0.7060)**
Suction Liner: **GG20 (0.6020)**
Wear Ring: **GG20 (0.6020)**
Shaft: **1.4021**
Shaft Sealing: **WC/SiC/NBR**
O-Rings: **NBR**
Suction liner adjustable by external regulation screws

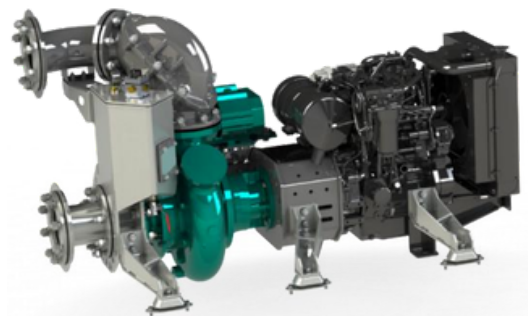



Priming System Pump type: **dry claw vacuum pump**
Air handling capacity: **60 m³/h**
Max. vacuum: **9.0 m**
Floatbox: **Hot dip galvanized Steel**
Non-return valve: **Ductile iron GJS400**
Check valve ball: **Rubber NBR**



ENGINE OPTIONS

Standard Model: **Hatz 3H50TICD/ Hatz 3H50TIC**
Emission standard: **Stage V/ Tier 4f**
Cylinders: **3**
Displacement litres: **1.46**
Aspiration **Turbocharger**
Bore and stroke mm: **84 x 88**
Maximum power: **27 kW @1900 rpm**
Variable speed: **1800 - 1900 rpm**
Combustion system: **High-pressure common rail direct injection**
Exhaust after treatment: **cEGR, DOC, DPF**




FRAME OPTIONS

Silent canopy Canopy type: **Stackable**
Material: **Hot dip galvanized Steel**
Dimensions LxWxH: **2299x1100x1601 mm**
Lifting point: **Single lifting point**
Forklift pockets: **Installed**



Open canopy Canopy type: **Stackable**
Material: **Hot dip galvanized Steel**
Dimensions LxWxH: **2299x1100x1601 mm**
Lifting point: **Single lifting point**
Forklift pockets: **Installed**

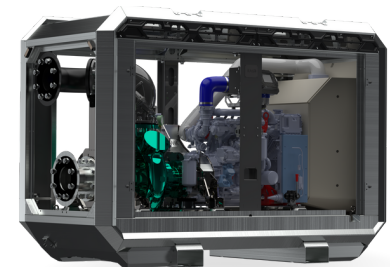

CONTROL PANEL OPTIONS


Standard AEONPUMP Software
Automatic level control
Hydrostatic level sensor*
SMS alarm system*
Online telemetry*
Dual float switch
Light Assistant*

* Optional





Curves at Speeds: A 1900 rpm B 1800 rpm

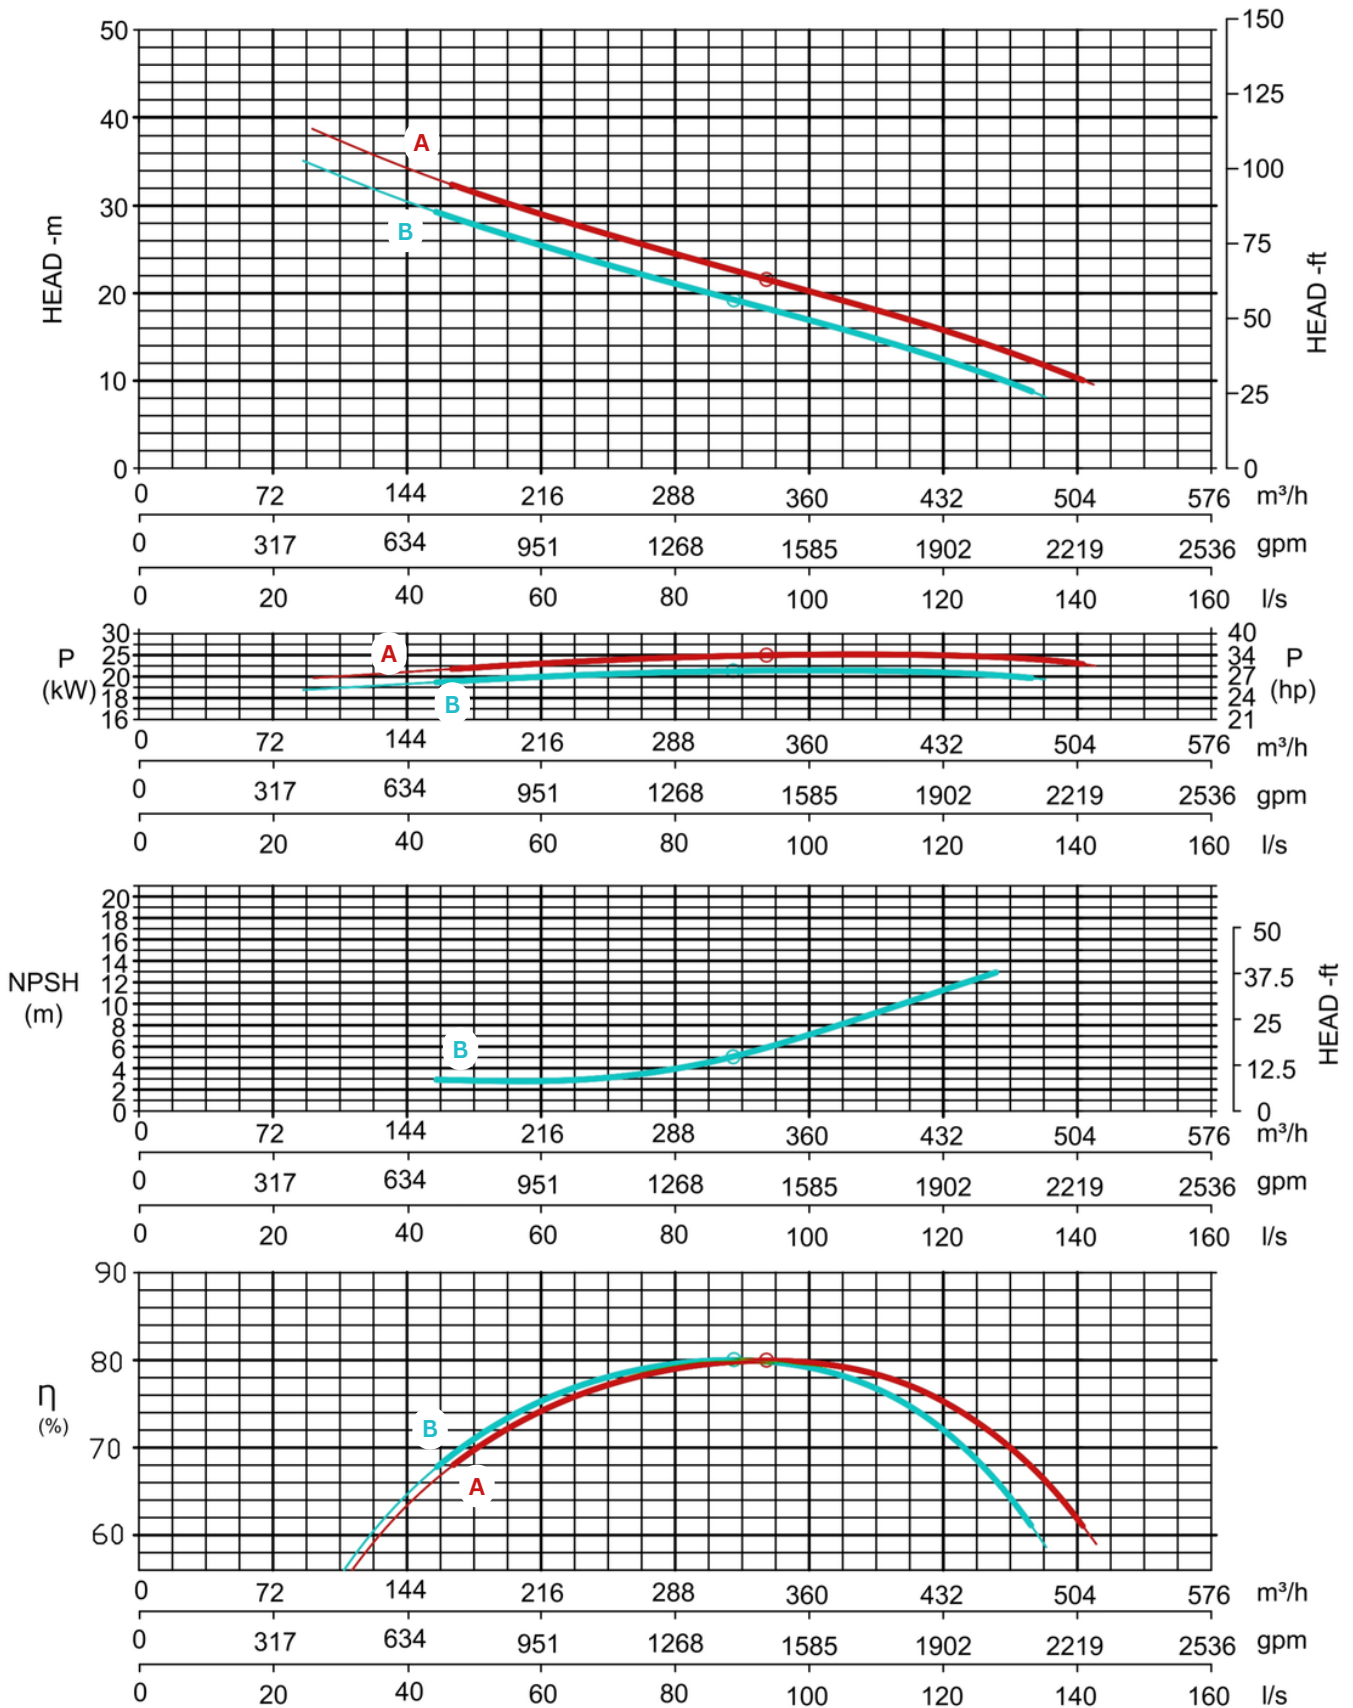

Note: Pump power P include mechanical seal friction and bearing frame losses, from a run in bearing frame.
 (Testing according to ISO 9906:2012-38)