


# RAPIDCUT-12

## TECHNICAL FEATURES


POWER SUPPLY.....Filtered, lubricated air  
 CONSUMPTION.....24 Lt./cut at 7 bar  
 MAXIMUM  $\phi$  CUT.....12 $\phi$  (Steel up to 70 Kg./mm<sup>2</sup>)  
 High tensile wire.....8 $\phi$  (Steel up to 180 Kg./mm<sup>2</sup>)  
 Prestressing strand max. 12.5 $\phi$  1/2" (7x4 $\phi$ ) (max. 180 Kg./mm<sup>2</sup>)  
 SPEED.....20 Cuts/minute  
 MAXIMUM PRESSURE.....8.5 bar  
 MINIMUM PRESSURE.....6 bar  
 WEIGHT.....10 Kg.

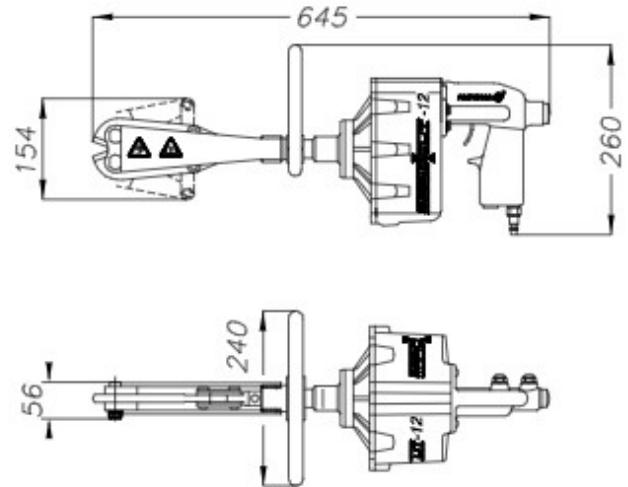

# RAPIDCUT-12L

## TECHNICAL FEATURES

POWER SUPPLY.....Filtered, lubricated air  
 CONSUMPTION.....24 Lt./cut at 7 bar  
 MAXIMUM  $\phi$  CUT.....12 $\phi$  (Steel up to 70 Kg./mm<sup>2</sup>)  
 High tensile wire.....8 $\phi$  (Steel up to 180 Kg./mm<sup>2</sup>)  
 Prestressing strand max. 12.5 $\phi$  1/2" (7x4 $\phi$ ) (max. 180 Kg./mm<sup>2</sup>)  
 SPEED.....20 Cuts/minute  
 MAXIMUM PRESSURE.....8.5 bar  
 MINIMUM PRESSURE.....6 bar  
 WEIGHT.....12 Kg.

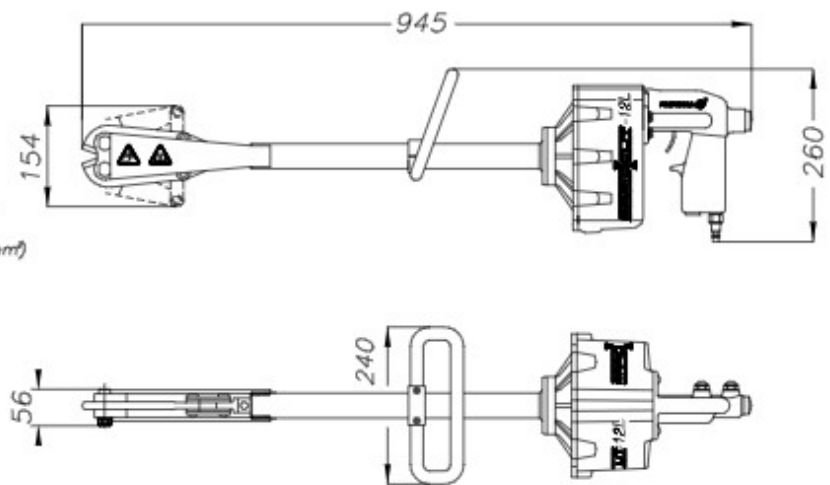

## APPROPRIATE BLADE TYPE



MAX. 8 $\phi$




REF. 1280TM  
 For high tensile wire  
 Up to 180 Kg./mm<sup>2</sup>



MAX. 7x4 $\phi$



REF. 1280TS  
 For prestressing strand  
 Up to 180 Kg./mm<sup>2</sup>



MAX. 12 $\phi$



REF. 1260TM  
 For rebar and mesh  
 Up to 70 Kg./mm<sup>2</sup>