RAPIDCUT-12

TECHNICAL FEATURES

POWER SUPPLY.....Filtered,lubricated air

CONSUMPTION.....24 Lt./cut at 7 bar

MAXIMUM ø CUT.....12ø (Steel up to 70 Kg./mm²)

High tensile wire.....8ø (Steel up to 180 Kg./mm²)

Prestressing strand max.12.5ø 1/2" (7x4ø) (max.180 Kg./mm²)

SPEED.....20 Cuts/minute

MAXIMUM PRESSURE.....8.5 bar

MINIMUM PRESSURE.....6 bar

WEIGHT.....10 Kg.

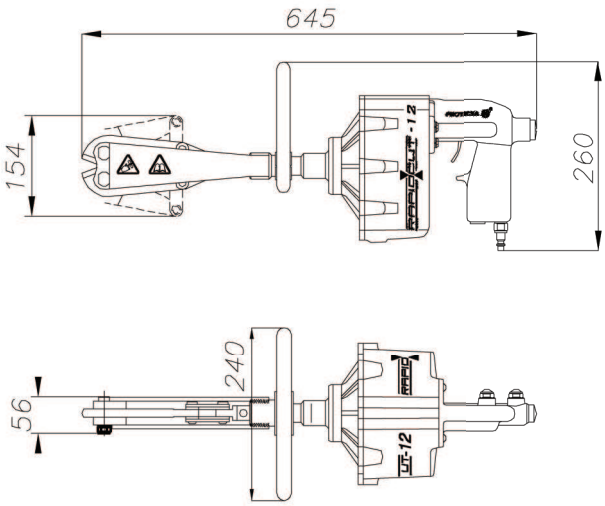

RAPIDCUT-12L

TECHNICAL FEATURES

POWER SUPPLY.....Filtered,lubricated air

CONSUMPTION.....24 Lt./cut at 7 bar

MAXIMUM ø CUT.....12ø (Steel up to 70 Kg./mm²)

High tensile wire.....8ø (Steel up to 180 Kg./mm²)

Prestressing strand max.12.5ø 1/2" (7x4ø) (max.180 Kg./mm²)

SPEED.....20 Cuts/minute

MAXIMUM PRESSURE.....8.5 bar

MINIMUM PRESSURE.....6 bar

WEIGHT.....12 Kg.

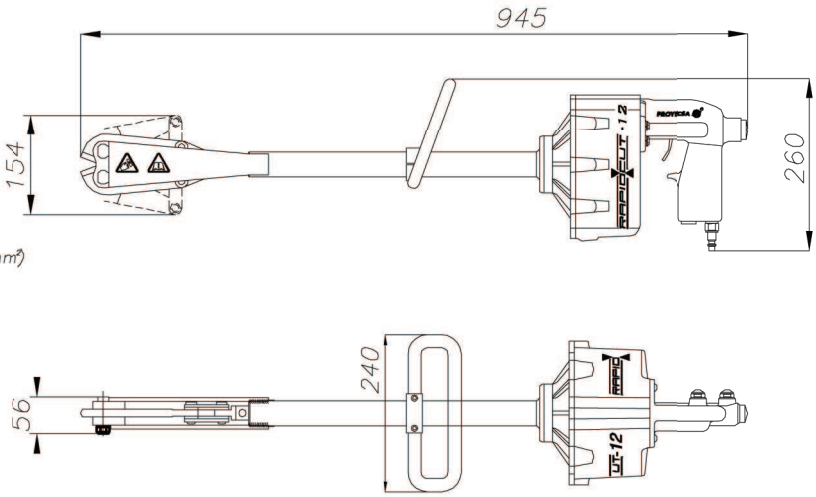

APPROPIATE BLADE TYPE



MAX. 8ø



REF. 1280TM
For higt tensile wire
Up to 180 Kg./mm²



MAX. 7x4ø



REF. 1280TS
For prestressins strand
Up to 180 Kg./mm²



MAX. 12ø



REF. 1260TM
For rebar and mesh
Up to 70 Kg./mm²