RAPIDCUT -8

TECHNICAL FEATURES

POWER SUPPLY.....Filtered,lubricated air

CONSUMPTION.....7 Lt./cut at 6.5 bar

MAXIMUM ø CUT.....8ø (Steel up to 70 Kg./mm²)

5ø (Steel up to 180 Kg./mm²)

SPEED.....60 Cuts/minute

MAXIMUM PRESSURE.....8.5 bar

MINIMUM PRESSURE.....6 bar

WEIGHT.....5.8Kg.

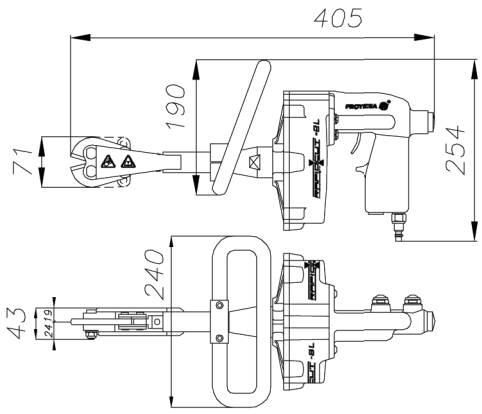

RAPIDCUT -8L

TECHNICAL FEATURES

POWER SUPPLY.....Filtered,lubricated air

CONSUMPTION.....7 Lt./cut at 6.5 bar

MAXIMUM ø CUT.....8ø (Steel up to 70 Kg./mm²)

5ø (Steel up to 180 Kg./mm²)

SPEED.....60 Cuts/minute

MAXIMUM PRESSURE.....8.5 bar

MINIMUM PRESSURE.....6 bar

WEIGHT.....7.2Kg.

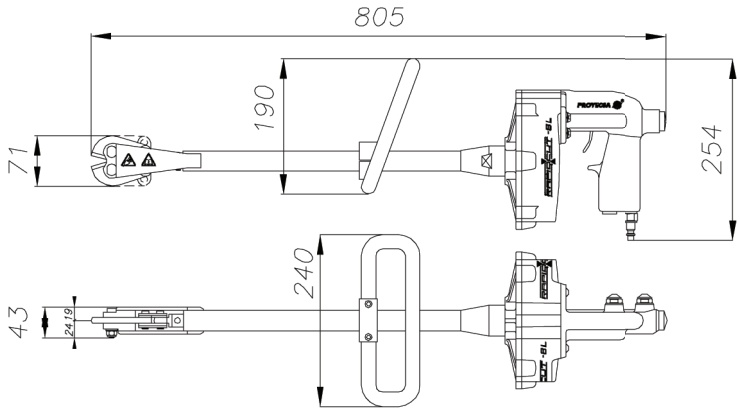

RAPIDCUT -8XL

TECHNICAL FEATURES

POWER SUPPLY.....Filtered,lubricated air

CONSUMPTION.....7 Lt./cut at 6.5 bar

MAXIMUM ø CUT.....8ø (Steel up to 70 Kg./mm²)

5ø (Steel up to 180 Kg./mm²)

SPEED.....60 Cuts/minute

MAXIMUM PRESSURE.....8.5 bar

MINIMUM PRESSURE.....6 bar

WEIGHT.....8.7Kg.

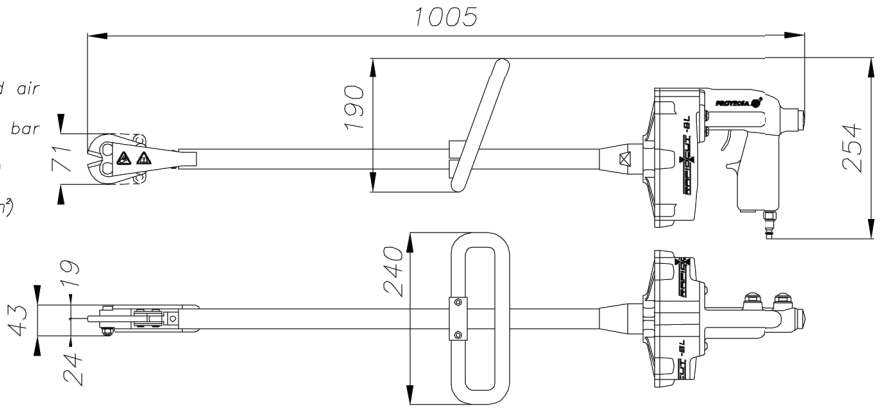

APPROPIATE BLADE TYPE





MAX. 5ø

REF. M80L

High tensile wire

Up to 180 Kg./mm²





MAX. 8ø

REF. M60L

Rebar and wire mesh

Up to 70 Kg./mm²